

PRODUCT INFORMATION



# MAGNETOMAT<sup>®</sup> 1.782

PC-CONTROLLED MAGNETOMETER

---



proof.

## FEATURES

- MAGNETOMAT® 1.782 – a PC-controlled system for versatile applications in the area of precise determination of magnetic flux density and magnetic permeability.
- Fluxgate magnetometers as sensing elements
- Measuring DC magnetic fields and AC magnetic fields up to 1 kHz.
- MAGNETOMAT application software for setting parameters, real-time result display, data sampling and report generation
- A wide range of different probes to fit versatile applications

## MEASUREMENTS

Depending on probe type and selected application software, the following measurements are possible:

- Magnetic flux density as absolute value up to 100  $\mu\text{T}$  or gradient up to 200  $\mu\text{T}$
- Relative magnetic permeability  $\mu_r$  in the range 1.0 to 2.0

## APPLICATIONS

- Long term monitoring of magnetic environmental conditions, e.g. prior to installation of magnetic sensitive devices like MRI systems
- Testing low permeability materials and machined components for magnetic remanence.
- Detection of ferrous inclusions in austenitic steels and nonferrous alloys
- Determination of relative magnetic permeability as part of the quality inspection for austenitic steels and nonmagnetic alloys
- Verify the nonmagnetic property of components for integration into magnetic sensitive devices
- Verify material changes caused by high temperature, corrosion, coating reduction or micro structural alteration

## COMPONENTS

To complete a measuring kit, the following components are necessary:

- Probe
- Sensor electronics (Probe power supply and ADC)
- Power supply (Mains adapter or battery pack)
- PC
- Application software

### MAGNETOMAT® 1.782 SENSOR ELECTRONICS (DESKTOP TYPE)



- Electronics including RS 232 PC interface
- Ports S1 and S2 to link two identical probes type A
- Port S1 to link one probe type B or permeability probe
- Port 3-A to link 1-Axis miniaturized sensor
- Power supply 12 – 24 VDC
- Socket „TRIG“ as trigger input (connector supplied)

## 1-AXIS-PROBES TYPE A, UP TO 2 IDENTICAL PROBES PER SENSOR ELECTRONICS

### Field and gradient probe pair



- Flexible arranged probe pair for determination of absolute magnetic field or gradient, depending on orientation of the probe elements
- Additional mounting device required for proper fixture and alignment of the sensor elements

### Differential probe



- Probe with coaxially at 100 mm distance arranged sensor elements, for detection larger magnetic anomalies

## 1-AXIS-PROBES, TYPE B, 1 PROBE PER SENSOR ELECTRONICS

### Micro field probe, axial



- Probe with axially arranged sensor elements, for field detection with high spatial resolution

### Micro field probe, transversal



- Probe with transversal arranged sensor elements, for field detection with high spatial resolution

### Point pole probe



- Probe with coaxially at 20 mm distance arranged sensor elements, for detection of fields emerging from a component perpendicular to the surface

### Micro differential probe



- Probe with parallel arranged sensor elements, for detection of field gradients with high spatial resolution

### Permeability probe



- Probe with integrated permanent magnet for determination of relative magnetic permeability  $\mu_r$  in the range 1.0 ... 2.0.
- Probe with ten times higher sensitivity (for  $\mu_r < 1.05$  static use recommended)
- For precise measurement the probe must be set on a plane surface, dimension of test specimen must be same size of calibration standard or larger


## 1-AXIS MINIATURIZED PROBE, 1 PROBE PER SENSOR ELECTRONICS



- Probe with axial arranged sensor elements, for field detection with high spatial resolution
- Compact, rugged design, water proof

## MAGNETOMAT® STANDARD-SOFTWARE


Application software for multi channel magnetic data acquisition with high sampling rates. The measuring values are recorded by the probe- and sensor electronics (desktop type) and transferred to the PC.

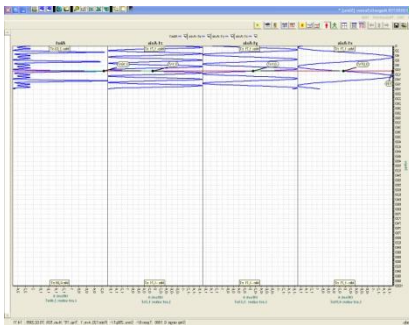

- Realtime data display
- Display of absolute and differential values
- Data storage and administration
- Adjustable sampling rate
- Zoom function for data display
- Low pass filter
- Single value selection
- Storage and export of selected values as .csv and .txt file

## MAGNETOMAT® HOTSPOT-SOFTWARE

Application software for recording magnetic anomalies during testing of semi-finished steel materials like tubes, bars and wire. A differential probe is being used as sensing element. The test specimen is being moved along the probe, with time based triggering of the data sampling.

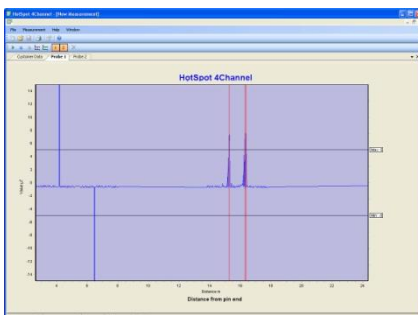


- Adjustable test parameters
- Data sampling rate, measuring range and threshold values are adjustable
- Test order, batch numbers, comments to be edited by the operator
- Adjustable color setting for screen and test report
- Test report with test data display as graphical chart or value table

## MAGNETOMAT® CLIENT-SOFTWARE

Application software for data display on a monitor when manually testing components for their magnetic remanence or relative permeability; optionally display of measured value or measured value combined with strip chart.



- Display of maximum and minimum peak values
- Display of peak value difference
- Indication of exceeding thresholds
- Display of measuring value in realtime
- Data storage and administration
- Adjustable sampling rate
- Low pass filter
- Datalogging and storage of measured values in a text file in tabular form

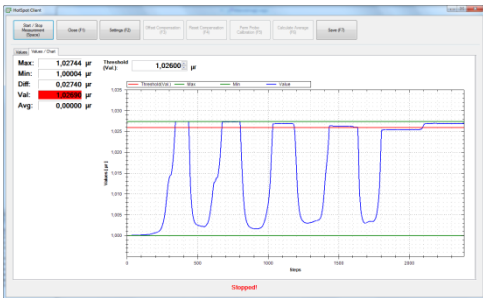


## TECHNICAL SPECIFICATION

### SENSOR ELECTRONICS

Measuring range	100 $\mu$ T / option: 1mT
Resolution	24 Bit ADC
Limiting frequency	1 kHz
Power supply	12 – 24 VDC
PC-interface	RS 232
Trigger input	5 V TTL/CMOS level trigger on falling edge trigger pulse width = 2/sampling rate
Dimension (LxWxH)	130x187x100 mm
Weight	approx. 0.5 kg


## PROBES

### Field and gradient probe pair

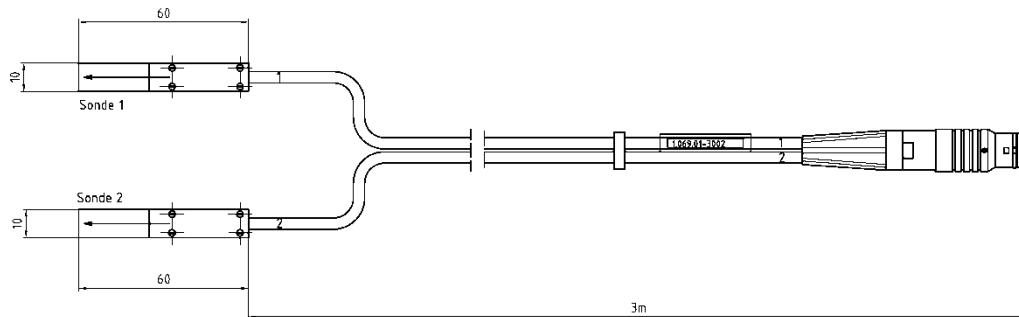


Measuring range, probe	250 $\mu$ T (500 $\mu$ T Gradient)
Measuring range probe + electronics	100 $\mu$ T (200 $\mu$ T Gradient)
Noise	30 (60) pT/ $\sqrt$ Hz@1Hz
Cable	3 m, 12-pin connector

### Differential probe

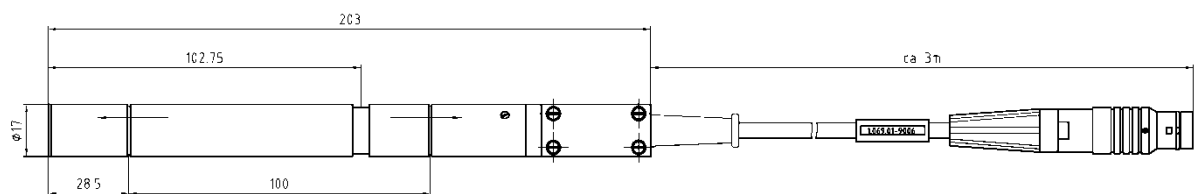


Measuring range, probe	250 $\mu$ T Gradient
Measuring range probe + electronics	200 $\mu$ T Gradient
Noise	50 pT/ $\sqrt$ Hz@1Hz
Cable	3 m, 12-pin connector

### Micro field probe, axial

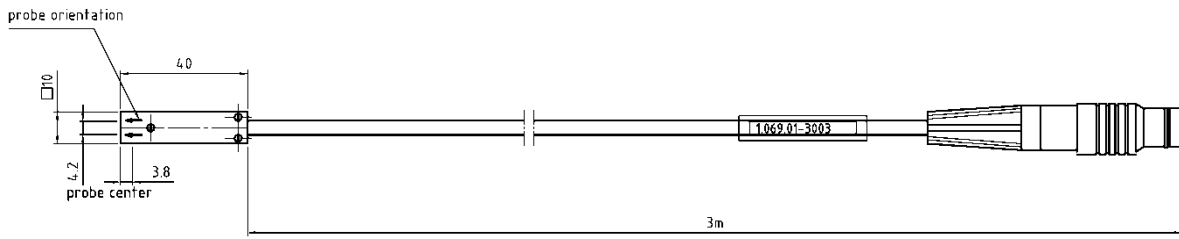

Measuring range, probe	1 mT
Measuring range probe + electronics	100 $\mu$ T
Noise	500 pT/ $\sqrt$ Hz@1Hz
Cable	3 m, 12-pin connector


### Micro field probe, transversal

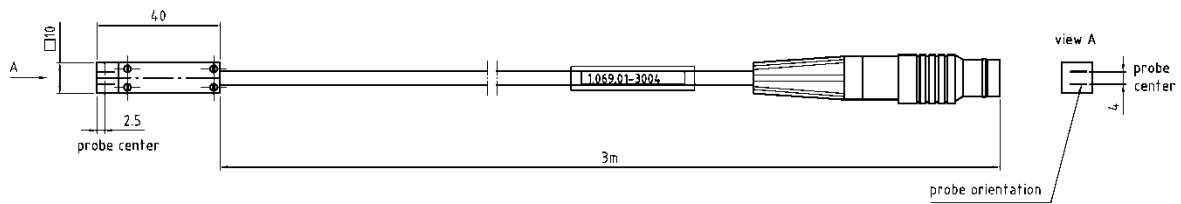

Measuring range, probe	1 mT
Measuring range probe + electronics	100 $\mu$ T
Noise	500 pT/ $\sqrt$ Hz@1Hz
Cable	3 m, 12-pin connector




### Point pole probe

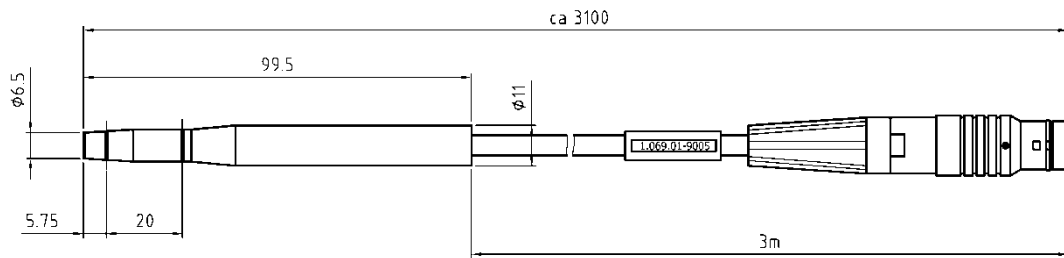


Measuring range, probe	1 mT
Measuring range probe + electronics	200 $\mu$ T Gradient
Noise	1 nT/ $\sqrt$ Hz@1Hz
Cable	3 m, 12-pin connector

### Micro differential probe

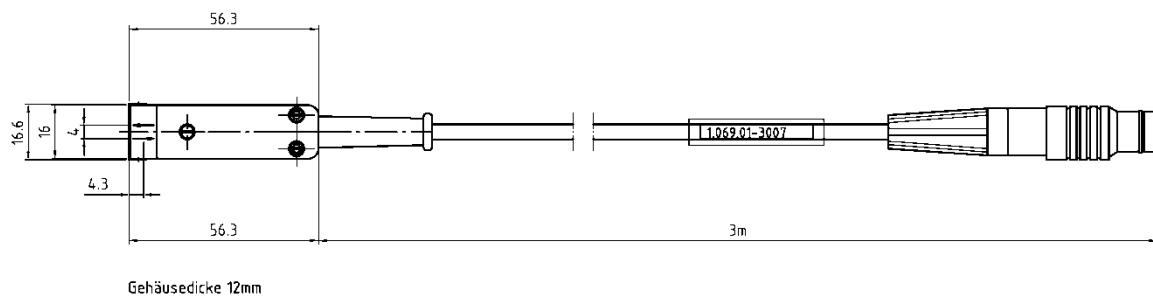


Measuring range, probe	1 mT
Measuring range probe + electronics	200 $\mu$ T Gradient
Noise	1 nT/ $\sqrt$ Hz@1Hz
Cable	3 m, 12-pin connector

### Permeability probe

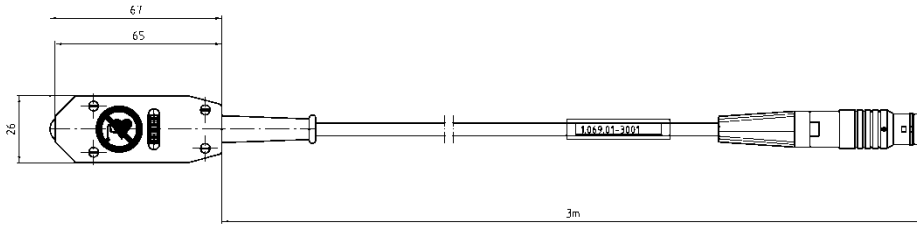

Measuring range, probe	$\mu_r$ 1.0 – 2.0
Measuring range probe + electronics	$\mu_r$ 1.0 – 1.08 (1.0 – 2.0 on request)
Cable	3 m, 12-pin connector

### 1-Axis Miniaturized Probe

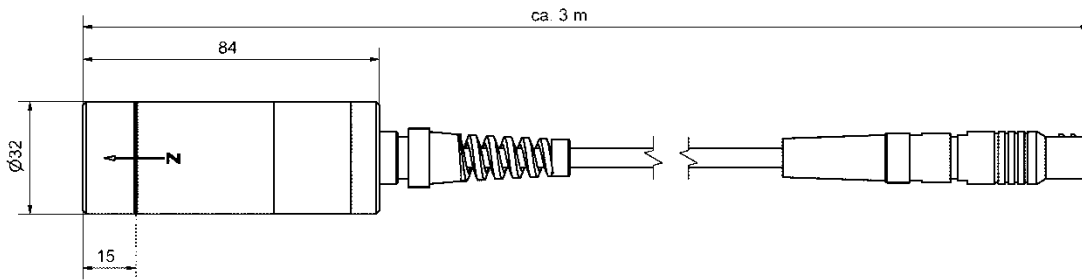

Measuring range, probe	100 $\mu$ T
Measuring range probe + electronics	100 $\mu$ T
Noise	35 pT/ $\sqrt{\text{Hz}}$ @1Hz
Cable	3 m, 12-pin connector
Protection grade	IP 68

---

## POWER SUPPLY

Mains adapter	24 VDC, 1 A, 90 – 264 VAC
Battery pack, rechargeable	NiMH 12 VDC, 3,3 Ah

## CABLE

Probe extension cables	3 / 10 / 15 m
------------------------	---------------

## PERMEABILITY CALIBRATION REFERENCE STANDARDS

Nominal value, traceable to national standards (PTB)	$\mu_r$ 1.2 / 1.05 / 1.025 / 1.005
Dimensions	Cylinder, 34 mm OD, 25 mm long

## SOFTWARE

PC requirements for all applications	32 / 64 bit OS Windows XP SP3 Windows 7 or higher
--------------------------------------	---

## IMPRINT



Reg.-No. 001159 QM08

### **Institut Dr. Foerster GmbH & Co. KG**

Division Detection-Systems & Magnetics  
In Laisen 70  
72766 Reutlingen  
Germany

t +49 7121 140-312  
f +49 7121 140-280  
dm@foerstergroup.de

MAGNETOMAT® 1.782  
Order number: 195 573 0  
Edition: 11/2015

Subject to change.

® Registered Trademark

© Copyright FOERSTER 2014

**[fluxgate-magnetometer.com](http://fluxgate-magnetometer.com)**